



CINGHIE TRAPEZOIDALI A SEZIONE STRETTA CONTI®V ADVANCE DIN 7753

NARROW V-BELTS CONTI®V ADVANCE DIN 7753

CINGHIE FASCIATE CON CORDE DI TENSIONE RINFORZATE E MESCOLE SPECIALI PER TRASMETTERE PIU' POTENZA IN MODO SICURO, DIN 7753



WRAPPED HEAVY-DUTY V-BELTS WITH REINFORCED TENSILE MEMBER AND ADVANCE COMPOUND FOR SAFELY TRANSMITTING MORE POWER, DIN 7753

Proprietà

- › Resistenti a temperature comprese tra -30°C e +80°C in funzione dell'applicazione
- › Stesso sviluppo L=L (da 1000 mm)
- › Elettricamente conduttrici a norma ISO 1813
- › Relativamente resistenti all'olio
- › Utilizzabili in climi tropicali
- › Resistenti alla polvere
- › Potenza aumentata
- › Idonee per frizioni
- › Idonee per lavorare anche sulla parte esterna
- › Non necessitano di manutenzione

Properties

- › Temperature range from -30 °C to +80 °C, depending on application
- › Matched set L=L (from 1000 mm)
- › Electrically conductive in accordance with ISO 1813
- › Conditionally resistant to oil
- › Suitable for tropical climates
- › Dust-proof
- › Increased performance
- › Suitable for clutches
- › Suitable for reserve flexing
- › Maintenance-free

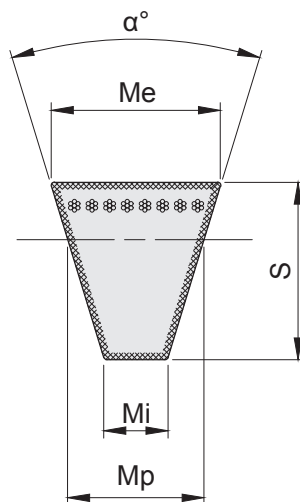

DIMENSIONI CINGHIA
DIMENSIONS OF V-BELT



descrizione	α gradi	Me mm	Mp mm	Mi mm	S mm
SPZ	38°	9,7	8,5	4,5	8
SPA	38°	12,7	11,0	6,2	10
SPB	38°	16,3	14,0	7,9	13
SPC	38°	22,0	19,0	10,3	18



* Fornita su richiesta / Supplied on request