




## KIT SERVOVENTILATI SERIE "TA" SERVO-VENTILATED KITS "TA" series

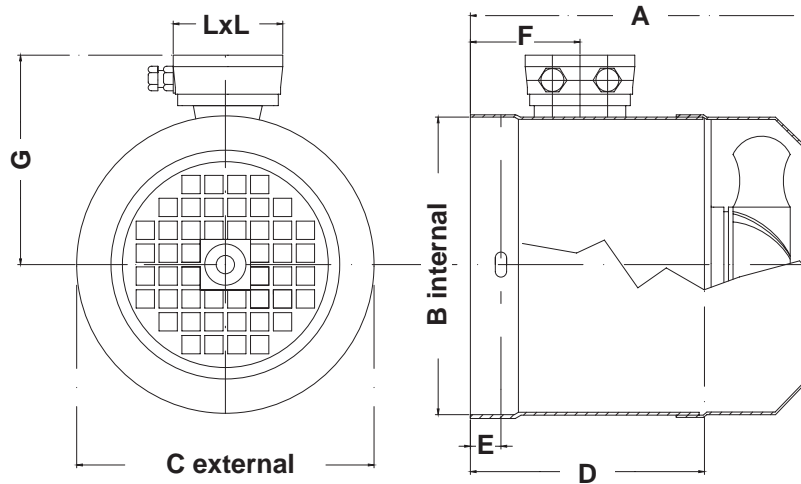

### MONOFASE 230V IP55 con morsettiera / SINGLE-PHASE 230V IP55 with terminal box

Tipo	Volt	Hz	RPM	Power Watt	Corrente assorbita A	Portata Aria m³/h
63	230	50/60	3000	22/21	0.14/0.12	170
71	230	50/60	3000	22/21	0.14/0.12	180
80	230	50/60	3000	22/21	0.14/0.12	180
90	230	50/60	2800	39/36	0.28/0.24	320
100	230	50/60	2800	39/36	0.28/0.24	340
112	230	50/60	2800	39/36	0.28/0.24	340
132	230	50/60	2800	39/36	0.28/0.24	450

### TRIFASE 400V IP55 con morsettiera / THREE-PHASE 400V IP55 with terminal box

* Tipo	Volt	Hz	RPM	Power Watt	Corrente assorbita A	Portata Aria m³/h
80	400	50/60	2800	144	0.36	300
90	400	50/60	2800	144	0.36	350
100	400	50/60	2800	144	0.36	400
112	400	50/60	2800	144	0.36	450
132	400	50/60	2800	144	0.36	550

\* a richiesta tipo TRIFASE 230/400V / on demand type THREE-PHASES 230/400 V

Tipo	Codice MONOFASE IP55 230V C/M	Codice TRIFASE IP55 400V C/M	A	B	C	D		E	F	G	LxL
						230V	400V				
63	SRV230TA063		102	121	123	58		6	50	104	75
71	SRV230TA071		185	136	138	138		6	85	112	75
80	SRV230TA080	SRV400TA080	212	154	156	168	87	6	85	120	75
90	SRV230TA090	SRV400TA090	243	174	176	178	112	6	115	130	75
100	SRV230TA100	SRV400TA100	245	198	200	198	107	16	110	140	75
112	SRV230TA112	SRV400TA112	273	219	221	210	132	8	138	175	75
132	SRV230TA132	SRV400TA132	297	260	262	235	148	8	156	170	75